


# Flindt Wall

Project name:

Project type:

Notes:

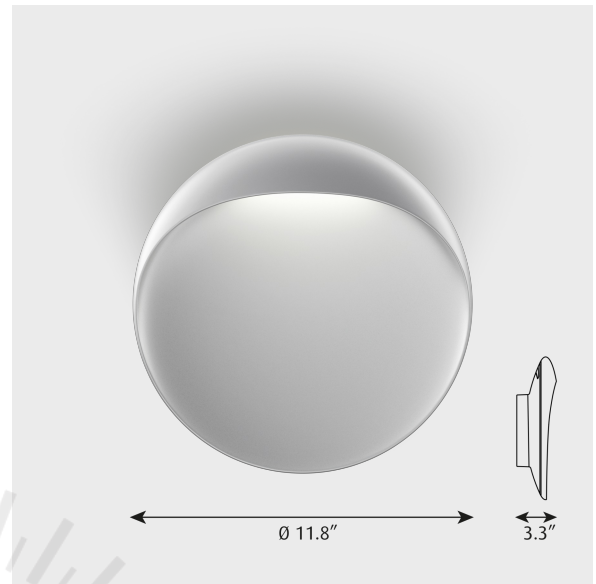

## Design

Christian Flindt

## Product description

Beautifully sculpted circular wall-mounted fixture that provides carefully crafted illumination for outdoor and indoor spaces. The gentle direct light illuminates the lunar like glowing disk with a gentle (top) back light which adds a layered depth. The Flindt Wall is complimented by the Flindt Bollard which provide a widely spaced pathway illumination.

## Variant options

Dimension	Light source	Voltage frequency	Color	Lighting control
11.8 IN	10W LED/2700K	120-277V/60HZ	<input checked="" type="radio"/> Corten color	Dim 0-10v
15.7 IN	10W LED/3000K		<input checked="" type="radio"/> Nat paint alu	Phase dimming (mains dimm)
7.9 IN	30W LED/2700K		<input type="radio"/> Wht	
	30W LED/3000K			

## Light description

The luminaire emits glare-free light. Concealed direct light reflects off of the front surface as well as upwards onto the wall surface. Available in 2700K or 3000K, additional CCT may be available. 7.9 in., 11.9 in. and 15.7 in. diameter fixtures available with 0-10V dimming (7.9in is also available with phase dimming at 120V).

## Mounting

Mounted directly to finished surface over a recessed junction box. Mounting hardware by others. Location of junction box is offset from center of fixture. Anchor locations differ by fixture size. Refer to mounting instructions for further information.

## Information

Electrical:  
System Wattage: 10 - 30 W  
LED Wattage: 9 - 28 W  
Delivered lumens: 336 lm - 1,052 lm  
Efficacy: 33.6 - 35.1 lm/W  
Certifications:  
cULus, Wet Location  
Protection class IP65  
IK class 08 (7.9IN); 09 (11.8IN & 15.7IN)  
BUG Rating: B0-U3-G1  
Controllability: 0-10V Dimming  
Min.-Max. Ambient Temp: -20°C to +40°C  
Color Rendering: Ra≥90

## Other functions

LED in 2700K, 3500K, 4000K, 5000K, or 5700K. Amber LED available for sea turtle nesting areas. Custom finishes. Alternative dimming controls.


## Specification notes

- 7.9 IN only available with DIM PHASE+0-10V.
- 11.8 IN and 15.7 IN only available with DIM 0-10V.


## Light distribution diagrams

For the full data set on all variants, see [louispoulsen.com](http://louispoulsen.com).


Cartesian

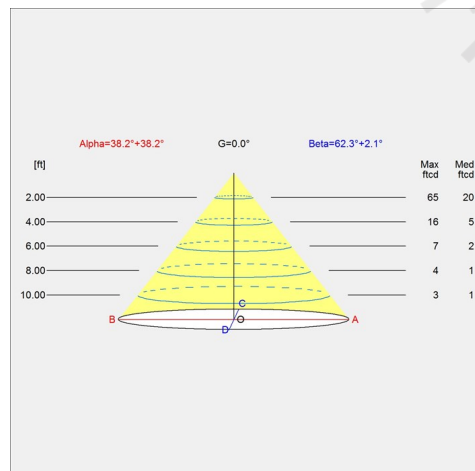

Isolux

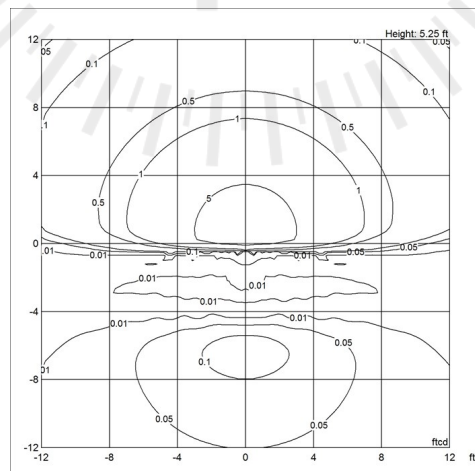

Polar

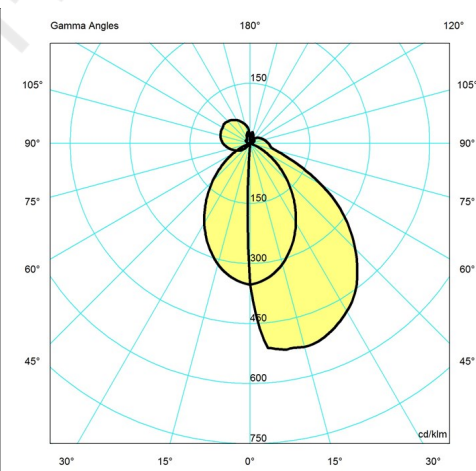

## Material

Front and back housing: Die cast aluminum, minimum 0. 1" thick. Lens: Injection molded U. V. and weather resistant clear acrylic, 0. 12" thick. Standard finish are matte, textured surface powder coat with minimum 2 mils thickness in corten color, natural painted aluminum, or white.

## Weight

Min: 14.808 lbs Max: 8.488 lbs

## Dimensions

11.8 IN, 15.7 IN, 7.9 IN



















## Finish

Corten color, Nat paint alu, Wht

## Voltage

120-277V/60HZ

## Variant options

Dimension	Light source	Voltage frequency	Color	Lighting control	Variant number
11.8 IN	30W LED/2700K	120-277V/60HZ	 Corten color	Dim 0-10v	5747912786
11.8 IN	30W LED/2700K	120-277V/60HZ	 Nat paint alu	Dim 0-10v	5747912744
11.8 IN	30W LED/2700K	120-277V/60HZ	 Wht	Dim 0-10v	5747912825
11.8 IN	30W LED/3000K	120-277V/60HZ	 Corten color	Dim 0-10v	5747912799
11.8 IN	30W LED/3000K	120-277V/60HZ	 Nat paint alu	Dim 0-10v	5747912757
11.8 IN	30W LED/3000K	120-277V/60HZ	 Wht	Dim 0-10v	5747912838
15.7 IN	30W LED/2700K	120-277V/60HZ	 Corten color	Dim 0-10v	5747912906
15.7 IN	30W LED/2700K	120-277V/60HZ	 Nat paint alu	Dim 0-10v	5747912867
15.7 IN	30W LED/2700K	120-277V/60HZ	 Wht	Dim 0-10v	5747912948
15.7 IN	30W LED/3000K	120-277V/60HZ	 Corten color	Dim 0-10v	5747912919
15.7 IN	30W LED/3000K	120-277V/60HZ	 Nat paint alu	Dim 0-10v	5747912870
15.7 IN	30W LED/3000K	120-277V/60HZ	 Wht	Dim 0-10v	5747912951
7.9 IN	10W LED/2700K	120-277V/60HZ	 Corten color	Phase dimming (mains dimm)	5747912663
7.9 IN	10W LED/2700K	120-277V/60HZ	 Nat paint alu	Phase dimming (mains dimm)	5747912621
7.9 IN	10W LED/2700K	120-277V/60HZ	 Wht	Phase dimming (mains dimm)	5747912702
7.9 IN	10W LED/3000K	120-277V/60HZ	 Corten color	Phase dimming (mains dimm)	5747912676
7.9 IN	10W LED/3000K	120-277V/60HZ	 Nat paint alu	Phase dimming (mains dimm)	5747912634
7.9 IN	10W LED/3000K	120-277V/60HZ	 Wht	Phase dimming (mains dimm)	5747912715