

# Marbul 3x LED 350mA 0-10V/Tre dim 1% DI

Marbul feels at home on both the wall and ceiling, which makes it ideal for both residential and hospitality projects. With fully integrated technology, it's a perfect ready-made solution for renovation projects as well. Marbul presents an ingenious design, where the body holds one or two globes, each with its own dedicated LED module. The elegant surface mounted luminaires enable you to direct light with a simple twist of each lamp-unit. Thanks to its streamlined gearhouse the 1, 2 or 3 spheres appear to float against the ceiling. The unique magnetic coverplate keeps screws and wires neatly out of sight.

DATE  
CUSTOMER  
PROJECT  
TYPE  
QTY



## Ordering info

| Product code                            | color Temp. |       | location Rating |                             | driver          |                                 | color      |                   |
|---|-------------|-------|-----------------|-----------------------------|-----------------|---------------------------------|------------|-------------------|
| <b>MARBUL-3L</b>                        | <b>27K</b>  | 2700K | <b>DP</b>       | suitable for damp locations | <b>0-10V-TD</b> | 0-10V/1% trailing edge dimmable | <b>WHT</b> | white struc       |
| Marbul 3x LED 350mA 0-10V/Tre dim 1% DI | 30K         | 3000K |                 |                             |                 |                                 | <b>GRD</b> | donkey grey struc |
|   | 35K         | 3500K |                 |                             |                 |                                 | <b>BLK</b> | black struc       |


## Your selection

| Ordering code                        | Description   | Modular reference |
|--------------------------------------|---|-------------------|
| <b>MARBUL-3L_27K_DP_0-10V-TD_BLK</b> | Marbul 3x LED 2700K 350mA 0-10V/Tre dim 1% DI black struc | US_11502132       |





Specifications

|                 |   |
|-----------------|---|
| Lamp            | LED Array   |
| CCT             | 2700K   |
| Driver          | driver included   |
| Location rating | suitable for damp locations                                   |
| CRI             | 90  |
| Power supply    | 120-277V  |
| Connected load  | 6W  |
| Lumen           | 634lm   |
| Efficacy        | 75lm/W  |
| UGR             | 14  |
| Remarks         | ! must be combined with magnetic reflector<br>! JA8 certified |

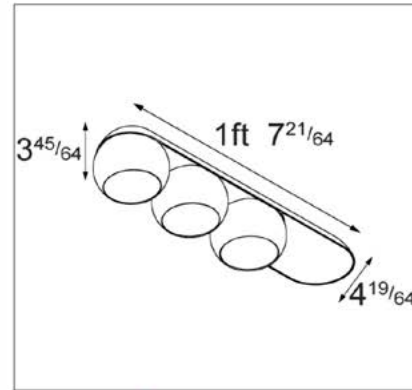

Photometrics

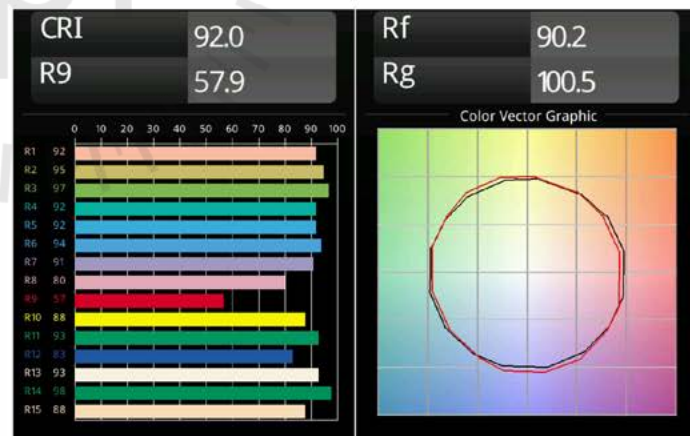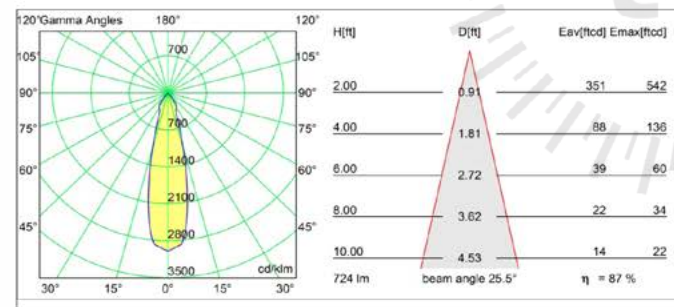

REFLECTOR | Ordering info

Product code

O-MR-3.2 \*  
Optical, Magnetic reflector 3.2


Optics

|    |                  |
|----|------------------|
| FL | flood (40°)      |
| ME | medium (25°)     |
| SS | super spot (10°) |

Color

|     |            |
|-----|------------|
| ALU | alu        |
| CHA | cham-pagne |
| GLD | gold       |

Ordering Code



Magnetic reflector 3.2 - alu



Magnetic reflector 3.2 - cham-pagne



Magnetic reflector 3.2 - gold