

Mini ritm trimless for Smart rings 2x LED DE

After twenty years still one of the architect's favorites. Mini ritm trimless, with its minimalistic features becomes part of the interior. Its dark or white casing vanishes when switching on the light. The versatile Mini ritm leaves nothing to the imagination with the technology on full display, allowing this luminaire to fit well into both a minimalist and an industrial-chic environment. The gimbaled system allows you to direct the light source at any angle of your choice. Connect Mini ritm trimless with Smart by adding the Smart frontrings to your recessed spot.

DATE
CUSTOMER
PROJECT
TYPE
QTY



Ordering info

Product code	color Temp.		location Rating		driver		color	
MINI-RITM-TL-2L	27K	2700K	DP	suitable for damp locations	DE	driver excluded	WHT	white struc
Mini ritm trimless for Smart rings 2x LED DE	30K	3000K					BL	black
	35K	3500K						

Your selection


Ordering code	Description	Modular reference
MINI-RITM-TL-2L_27K_DP_DE_BL	Mini ritm trimless for Smart rings 2x LED 2700K DE black	US_12531002



Mini ritm trimless for Smart rings 2x LED DE | SPECIFICATIONS & PHOTOMETRICS

Specifications



Lamp	LED Array	
CCT	2700K	
Driver	driver excluded - requires housing	
Cut-out size	1 8 ⁷ / ₆₄ w 4 ¹¹ / ₆₄	
Weight	2.8lbs	
Location rating	suitable for damp locations	
CRI	92	
Power supply	500mA	350mA
Forward voltage	18.4Vf	17.8Vf
Connected load	9.2W	6.2W
Lumen	707lm	526lm
UGR	15	14

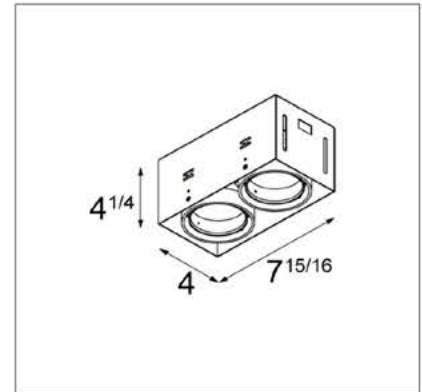

Remarks

- ! has to be combined with Smart frontings
- ! suitable for damp locations
- ! has to be used with appropriate housing (LED gear incl.)
- ! combine with drywall plaster flange for ceiling thickness > 0 25/32" (20mm) and ≤ 1 31/32" (50mm)
- ! CCEA Chicago Plenum rated & Airtight per ASTM-E283-04 (when used with IC-UAT box)

Photometrics

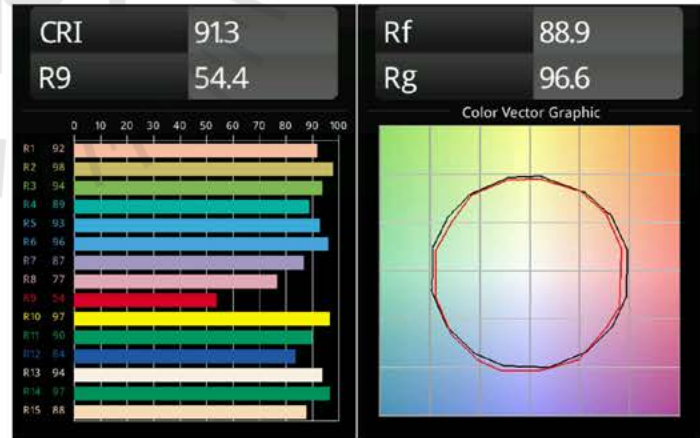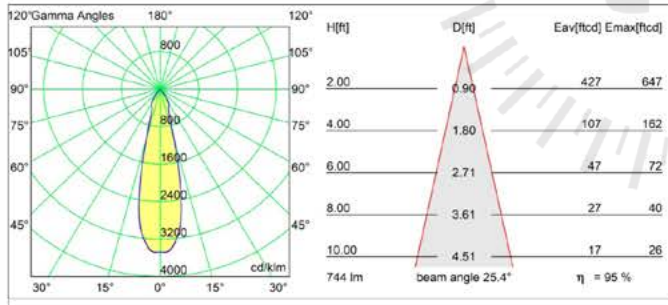



HOUSING | Ordering info

Product code

IC-UAT-MINI-RITM-TL * Insulated Ceiling Rated - Ultra Airtight - Mini ritm trimless
NON-IC-MINI-RITM-TL * Non-Insulated Ceiling Rated - Mini ritm trimless

Lamps

2L	2Lamps
----	--------




Driver

0-10V-TD	0-10V/1% trailing edge dimmable
	0-10V/1% Eleded

Output

350
500

Ordering Code

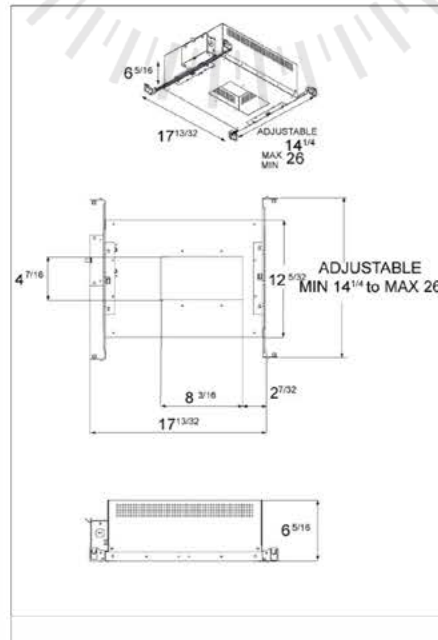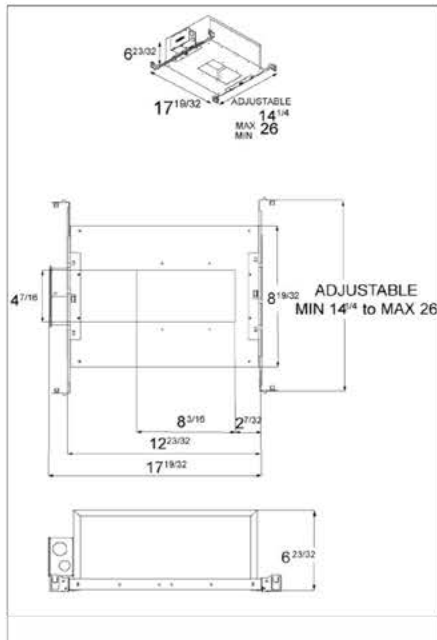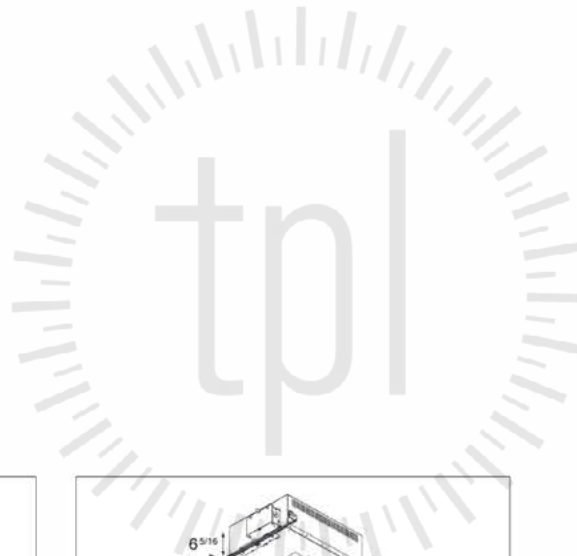



FRONT RING | Ordering info

Product code

O-SMART-F-FR * Optical, Smart front ring, Flat
O-SMART-C-FR * Optical, Smart front ring, Cake
O-SMART-L-FR * Optical, Smart front ring, Lotus
O-SMART-K-FR * Optical, Smart front ring, Kup


Optics

FL	flood (40°)
ME	medium (25°)
SP	spot (15°)


Color

BL	black
WHT	white struc


Ordering Code




Smart flat fronting



Smart Cake fronting



Smart Lotus fronting



Smart Kup fronting