Esprit Floor	Stand- Elegant	<b>Interior Spotlight</b>	Luminaire


kreon

Date:	Customer:	
Project:		
Туре:		Qty:
		kreon esprit is an elegant and simple spotlight luminaire that seeks to cast a perfect pool of light. LED light sources are contained within light projecting cylinders available as a ceiling mount, pendant and floor standing. Each provide a fully rotational and adjustable movement for the heads to enable total flexibility when directling light. Remote positioned control gear is located above the ceiling void and can operate with single or twin headed models.
-	- Milli	
1		
Construction		
Luminaire	Mounting Option	
Made from high-pressure	<ul> <li>Floor Standing</li> </ul>	
die cast aluminum. Surface treatment by powder-coated.	<ul> <li>2 color chices for stand</li> </ul>	4
	<ul> <li>2 length options</li> </ul>	
Finishes <ul> <li>White</li> </ul>	<ul> <li>Ceiling Mount (see other spec sheet)</li> </ul>	
	Pendant Mount	
• Black	(see other spec sheet)	
<b>Electrical Characteris</b>	tics	
LED Specification	Gear	
Cree LED.	Standard 120V driver	-
LED Life		
L70 greater than		
60,000 hours.		
Correlated Color Temperature (CCT) • Available in 2700K or 3000k		
• CRI 80+ or CRI 90+		

## **Esprit Floor Mount– Elegant Interior Spotlight Luminaire**


## **Ordering Codes**


KUESF -									
KREON ESPRIT MOUNT	Luminaire Heads	LIGHT SOURCE AND CCT*	CRI	FINISH COLOR*	Pole Length**	Floor stand color	ELECTRIC GEAR		
<b>ESF</b> – Floor Mount	01 – Single 02 – Double	<b>27</b> – 2700K <b>30</b> – 3000K	80 – 80+ min CRI 90 – 90+ min CRI	BLK – Black WH – White	SF – Single Floor 4.5ft (Only available with single head) DF – Double Floor (5.3ft) (Only available with double head)	CB – Carrra bianco NBS – Natural Blue Steel	OF2 – 700mA, ON/OFF (integral) D2 – 0-10V Dim (10%) D3-2W– Lutron Hi-Lume Dim to 1% (2Wire forward phase 120V) *1 D3-3W– Lutron Hi- Lume Dim to 1% (3 wire 120/277V) D3-ECO– Lutron Hi-Lume dim to 1% soft-on, fade to- black (5 wire 120/277V) D4– EldoLED dim to dark DALI– Dali		
Ordering Example: KUESF-02-27-80-BLK-DF-CB-D2									
* Consult factory for other options ** Consult factory for length options *** Driver included <sup>1</sup> Only with double/double									

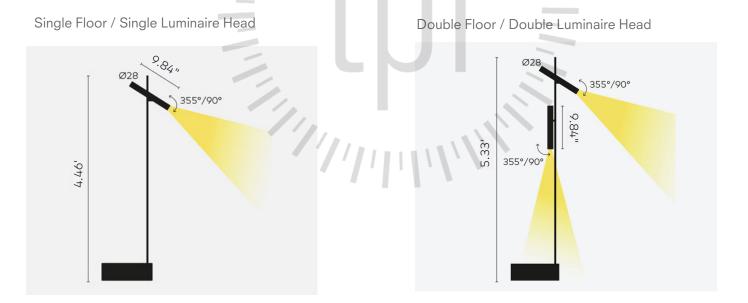




## **Floor Mounting/Installation**






2. Choice of 2 length sizes. Single luminaire head gets the single base. Double luminaire head gets the double base.

1. Base





5. Guide the wires through the base and make connection.

6. Aim the fixtures, 360degrees rotation and 90 degree inclination and connect to the power supply.

