

The Strut LED path exemplifies the epitome of a modern, minimalist aesthetic. The clean lines and modern design can effortlessly disappear into the setting or be positioned to make a bold statement. Also available as a matching 42" bollard. Ideal for outdoor path and campus illumination.

**High quality LM80-tested LEDs**  
for consistent long-life performance and color

**Outstanding protection against the elements:**

- Powder coat finishes
- Stainless Steel mounting hardware
- Impact-resistant, UV stabilized frosted acrylic lensing

**Bolt or Stake mounting options**

**SPECIFICATIONS**

DELIVERED LUMENS	693.1
WATTS	15
VOLTAGE	12V (Transformer sold separately)
DIMMING	MLV
LIGHT DISTRIBUTION	Symmetric
MOUNTING OPTIONS	Bolt or Stake
CCT	2700K, 3000K
CRI	90
COLOR BINNING	3 Step
BUG RATING	B0-U1-G0
DARK SKY	Compliant
WET LISTED	IP65
GENERAL LISTING	ETL
CALIFORNIA TITLE 24	Can be used to comply with CEC 2016 Title 24 Part 6 for outdoor use. Registration with CEC Appliance Database not required.
START TEMP	-30°C
FIELD SERVICEABLE LED	Yes
CONSTRUCTION	Aluminum
HARDWARE	Stainless Steel
FINISH	Powder Coat
LED LIFETIME	L70; 70,000 Hours
WARRANTY*	5 Years
WEIGHT	4 lbs.

\* Visit [techlighting.com](http://techlighting.com) for specific warranty limitations and details.



STRUT PATH  
shown in bronze



STRUT PATH  
shown in charcoal


**12V AC TRANSFORMERS\***  
(OUTDOOR RATED, ORDERED SEPARATELY)

ITEM	DESCRIPTION	HOUSING	DIMMING
<b>700OT150T</b>	MAGNETIC, 150W, 120V	STAINLESS STEEL	MAGNETIC
<b>700OT300T</b>	MAGNETIC, 300W, 120V	STAINLESS STEEL	MAGNETIC

**ORDERING INFORMATION**

700OASTR	CRI/CCT	LENGTH	LENS	FINISH	VOLTAGE	DISTRIBUTION	OPTIONS
	927 90 CRI, 2700K	18 18"	D DIFFUSE	Z BRONZE	12 12V*	S SYMMETRIC	CONCRETE MOUNT
	930 90 CRI, 3000K			H CHARCOAL			ST STAKE MOUNTING KIT
				B BLACK			

\*12V TRANSFORMER ORDERED SEPARATELY.




Strut Path

## PHOTOMETRICS\*

\*For latest photometrics, please visit [www.techlighting.com/OUTDOOR](http://www.techlighting.com/OUTDOOR)

### STRUT PATH

Total Lumen Output: 693.1  
 Total Power: 14.6  
 Luminaire Efficacy: 47  
 Color Temp: 3000K  
 CRI: 80+  
 BUG Rating: B0-UT-G0

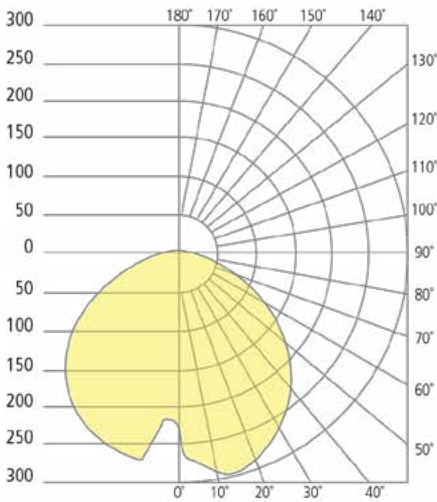

## PROJECT INFO

FIXTURE TYPE & QUANTITY

JOB NAME & INFO

NOTES

---



---



---



---



---



---

TECH LIGHTING

VISUAL COMFORT & CO.

7400 Linder Avenue, Skokie, Illinois 60077

T 847.410.4400 F 847.410.4500



© 2020 Tech Lighting, L.L.C. All rights reserved. The "Tech Lighting" graphic is a registered trademark. Tech Lighting reserves the right to change specifications for product improvements without notification.